


made of grade 304 stainless steel - grade 316 on request

Floor drains with square top plate and vertical outlet, with one floor drain-channel connection, removable Total Hygienic cup shaped odor trap pipe and filter basket.

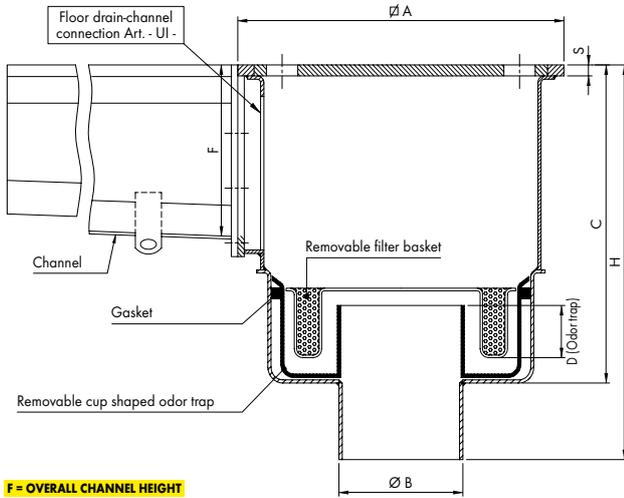

F = OVERALL CHANNEL HEIGHT

Dwg. No. 0111


| Article         | DIMENSIONS IN mm |     |     |       |    |       | FLOW RATE |          | LOAD CAPACITY IN Kg |              |
|-----------------|------------------|-----|-----|-------|----|-------|-----------|----------|---------------------|--------------|
|                 | R=low profile    | Ø A | S   | Ø B*  | C  | D     | H         | with Kit | without kit         | CONCENTRATED |
| R CV 75 206 TH  | 200              | 6   | 75  | F#80  | 20 | F#145 | 60        | 160      | 1000                | 10000        |
| CV 75 206 TH    | 200              | 6   | 75  | F#120 | 50 | F#185 | 60        | 160      | 1000                | 10000        |
| R CV 110 206 TH | 200              | 6   | 110 | F#80  | 20 | F#145 | 60        | 240      | 1000                | 10000        |
| CV 110 206 TH   | 200              | 6   | 110 | F#120 | 50 | F#185 | 60        | 240      | 1000                | 10000        |
| R CV 75 308 TH  | 300              | 8   | 75  | F#70  | 20 | F#135 | 80        | 180      | 1000                | 10000        |
| CV 75 308 TH    | 300              | 8   | 75  | F#120 | 50 | F#185 | 80        | 180      | 1000                | 10000        |
| R CV 110 308 TH | 300              | 8   | 110 | F#70  | 20 | F#135 | 135       | 340      | 1000                | 10000        |
| CV 110 308 TH   | 300              | 8   | 110 | F#120 | 50 | F#185 | 135       | 340      | 1000                | 10000        |

\* Different diameters on request.

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



Ultra-low profile floor drains with square top plate and horizontal outlet, with one floor drain-channel connection removable Total Hygienic cup shaped odor trap pipe and filter basket.

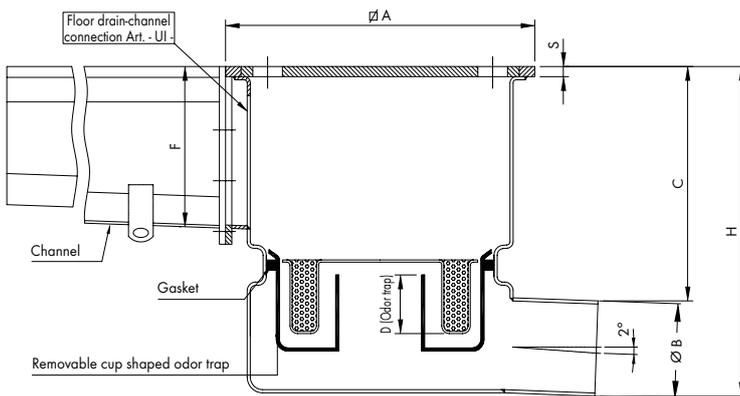

F = OVERALL CHANNEL HEIGHT

Dwg. No. 0004

| Article          | DIMENSIONS IN mm |     |     |      |    |       | FLOW RATE |          | LOAD CAPACITY IN Kg |              |
|------------------|------------------|-----|-----|------|----|-------|-----------|----------|---------------------|--------------|
|                  | R=low profile    | Ø A | S   | Ø B* | C  | D     | H         | with Kit | without kit         | CONCENTRATED |
| UR CL 50 206 TH  | 200              | 6   | 50  | F#50 | 20 | F#110 | 50        | 80       | 1000                | 10000        |
| UR CL 63 206 TH  | 200              | 6   | 63  | F#47 | 20 | F#110 | 60        | 120      | 1000                | 10000        |
| UR CL 75 206 TH  | 200              | 6   | 75  | F#55 | 20 | F#130 | 60        | 160      | 1000                | 10000        |
| UR CL 110 206 TH | 200              | 6   | 110 | F#50 | 50 | F#160 | 60        | 240      | 1000                | 10000        |
| UR CL 50 308 TH  | 300              | 8   | 50  | F#60 | 20 | F#110 | 50        | 100      | 1000                | 10000        |
| UR CL 63 308 TH  | 300              | 8   | 63  | F#47 | 20 | F#110 | 60        | 180      | 1000                | 10000        |
| UR CL 75 308 TH  | 300              | 8   | 75  | F#55 | 20 | F#130 | 80        | 240      | 1000                | 10000        |
| UR CL 110 308 TH | 300              | 8   | 110 | F#50 | 50 | F#160 | 135       | 340      | 1000                | 10000        |

\* Different diameters on request.

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



The removable cup shaped odor trap makes it possible to empty the wastewater out of the floor drain. It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.

TOTAL HYGIENIC DRAINAGE SYSTEMS

